

# Statement




**Canadian Solar** : **KuMax module**

**Van der Valk Solar Systems** : **ValkPro+ flat roof system**

The following mounting system is compatible with Canadian Solar KuMax module CS3U-330 / 335 / 340 / 345P (1000 V / 1500 V). Taken into account module clamp specifications and mounting on the short side of the panel.

## Canadian Solar

Module : KuMax module CS3U-330 / 335 / 340 / 345P (1000 V / 1500 V)  
Dimensions : 2000 x 992 x 40 mm  
Weight : 22,6 kg  
Max uplift load : 1000 Pa  
Max downforce load : 1000 Pa  
A2 range : 0-250 mm

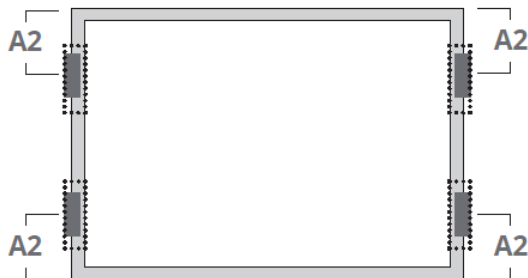

Use four clamps on the short side.

## Van der Valk Solar Systems

Mounting system : ValkPro+ flat roof  
Application : South and East-West  
Technical calculations : The calculations of Van der Valk Solar Systems apply to the EN Eurocodes, NEN7250, annexes of the EN 1990, EN 1991-1-3 and EN 1991-1-4 per relevant country and have been stated by wind tunnel tests.



Date 15-3-2018

Canadian Solar Inc. and Van der Valk Solar Systems